



INNOVATIVE DESIGNS
FOR CREATIVE SPACES.

Velocity Table Legs

Installation Instructions

Tools Required for Assembly:

- #2 Phillips Head Screwdriver
- (Recommended) Cordless Screwdriver with #2 Phillips Bit


Hardware Included:

- 4 x 3/4" #10 Phillips Head Screws
- 1 x Allen Wrench (Hex Key)

Step 1

Carefully remove outer packaging and place the table topside-down on a clean, non-scratching surface.

You will see three or more heavy duty steel brackets on the underside of the table top. These brackets have been pre-installed at the factory to ensure perfect leg positioning and make assembly easier and faster.

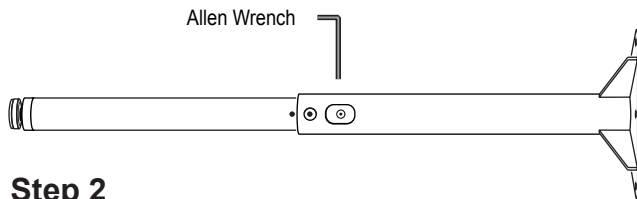

Step 2

Set the heights of your Velocity legs. Use the provided Allen wrench to tighten the set screws. Check that all legs are set to the same height before proceeding.

NOTE: Allow for the table top thickness of 1-1/4" when determining height. If you are installing optional casters, allow for an additional 3".

Step 3

Turn the leg upside down and slide it fully into the pre-installed bracket. Install the Phillips head screw through the outer center hole and into the table top. Tighten fully, and repeat for all remaining legs.

With a helper, turn the table upright. Nylon glides at the bottom of each leg can be adjusted to perfectly level the table.

